

2





W-08-23-0884

1

11

1/2 " N

ج

پ

~ O

~

~

ٲ

ٲ

105~

ٲ

ٲ

105~

ج

ج ~

1/2 " N

ج O

1 1/2 " N

2022 1 1 -2022 12 31

ج

48.3 kg CO₂-eq

~

ج

آ

پ


ٲ

ISO 14040:2006

ٲاٲ



1.	ଞ		3
2.			3
3.	ଞ		3
4.			

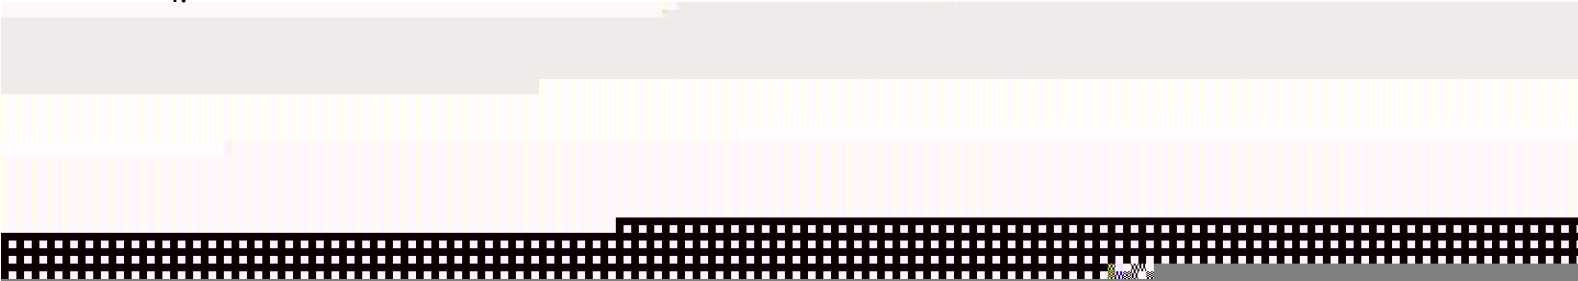



٤

ج

٧١١

PVC

4.2

1/2 " N

ج

4.3

ج

١

٧

ج

١

٧

ج

١

ج

٧ ١

١

١

ج

١

٧ ١

١

١

٧ ١

ج

١

4.4

4.4.1



þ ~

W-08-23-0884

5

11

4.4.2



Pin	NML1/2H.00.02-HPb55-3/-HX 3		0.9	g
Inner core	NML1/2B.02.02- /-HX 3		1.24	g
U Rear insulator	NML1/2F.00.08-TPX/-	TPX	0.15	g
Insulator	NML1/2F.00.07-TPX/-	TPX	0.25	g
Seal ring	NML1/2H.00.06-R01/-		0.15	g
PVC PVC flat pad	NML1/2E.00.08-PVC R01/-	PVC	0.22	g
√ Circlip	NML1/2F.00.06-SUS304/-	304#	0.37	g
packaging			1/300	p

2

Λ				
Λ		5T	171	km
		30T	57	

3

--	--



þ ~

W-08-23-0884

7

11

Fransiska

m

- -

.

08



2022 1 1 2022 12 31

6.2

≤ 0.5%

6.2.1

cut-of

6.2.2

6.3

2019

GWP100

2

IPCC

7

		48.3	kgCO ₂ -eq
A	Upstream transportation	0.003	
	Raw material assembly	8.57	
	Packaging	0.121	
	Downstream transportation	39.6	
A			kgCO ₂ -eq
	Enclosure	0.737	
	Inner core	0.783	
	Seal ring	0.777	
	Screw insert	0.788	
V	Circlip	0.24	
	Insulator	1.29	
U	Rear housing	0.787	
U	Rear insulator	0.777	
	Cable clamp	0.661	



W-08-23-0884


9

11


Pin
PVC PVC flat pad

0.584
1.14

7.1

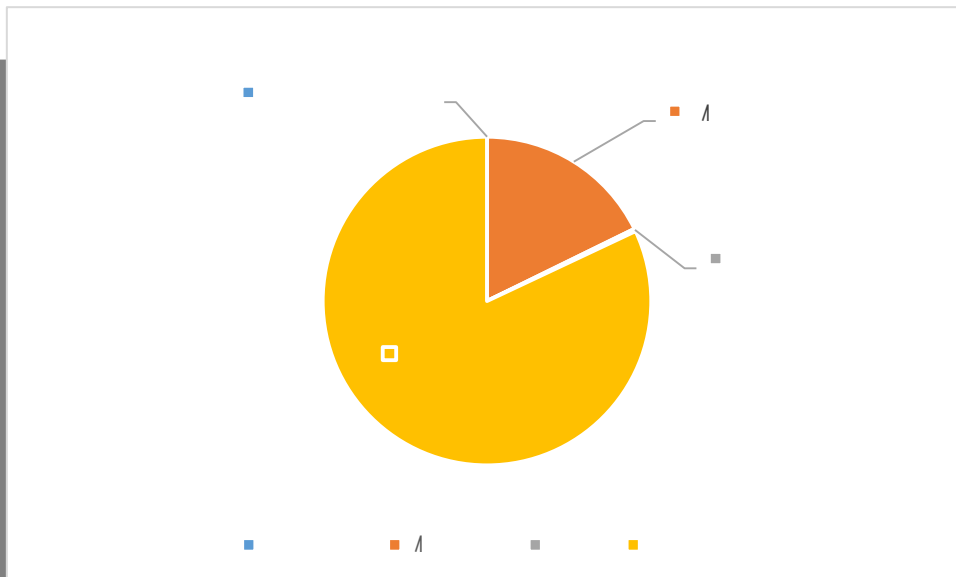

1

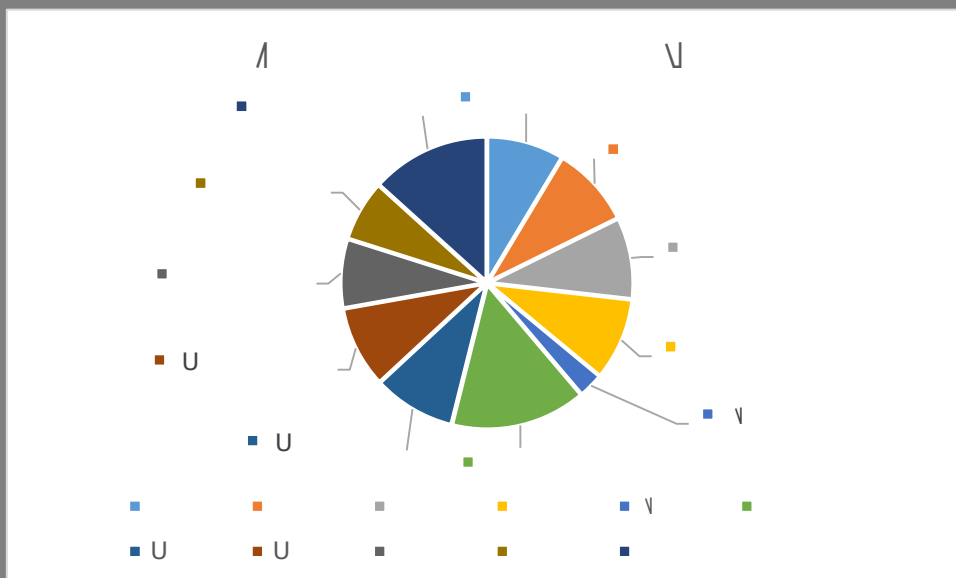


2 A

V





7.2

7.2.1

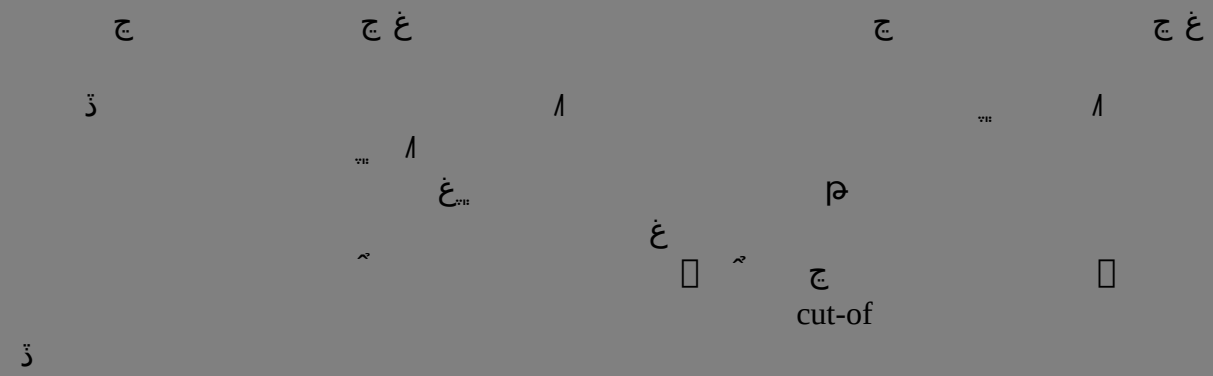


7.2.2

IPCC 2021 GWP100 V1.01

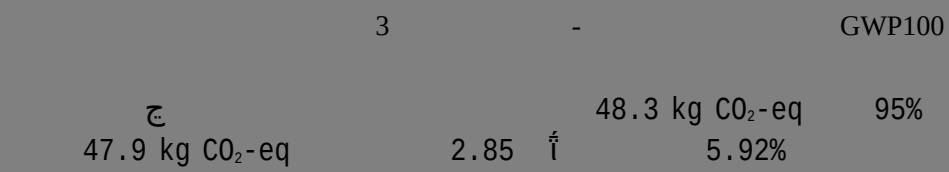

7.3

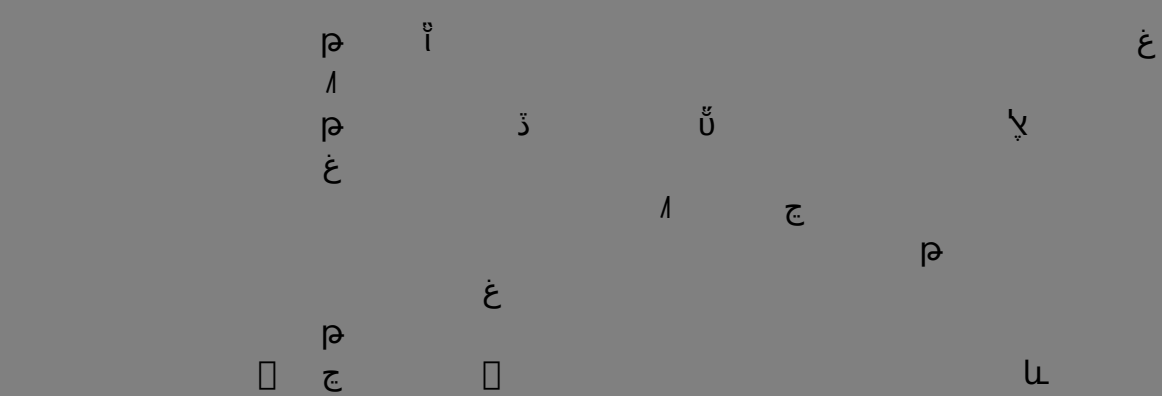



2023

8

8.1

3

8.2

U

8.3

U

8.4

U

